


| Product Name | Drop-In Double Hob Cooktop | Quantity | | Item # | |
|--------------|----------------------------|----------|--|--------|--|
|--------------|----------------------------|----------|--|--------|--|



Note: Induction cooking requires the use of induction compatible (i.e. magnetic) pots and pans.

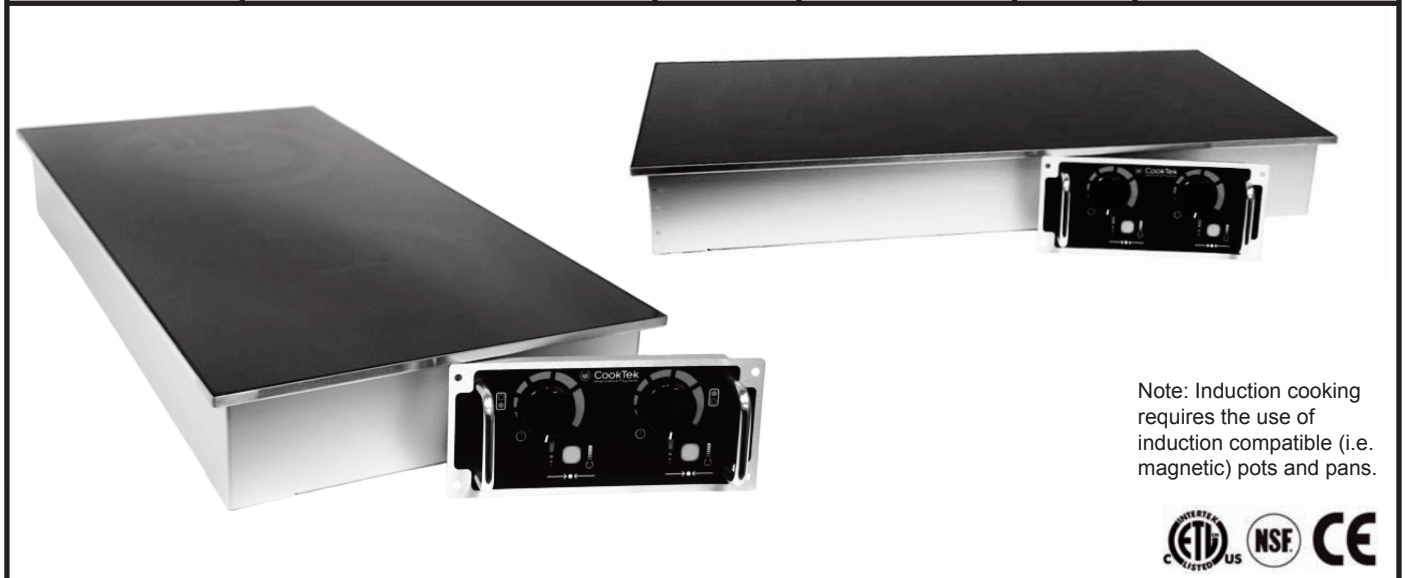

Standard Features

- Drop-in countertop design with stainless steel edging, aluminum housing and control box, heavy duty electronic components, and high impact, thick, glass-ceramic top engineered for use in commercial kitchens
- Available in front-to-back (F) and side-by-side (S) models
- Each induction hob has its own separate controls for independent operation and functionality
- Control knob for ease of use and automatic power or temperature control
- Temperature allows for 27 precise temperature settings and 20 power cook settings
- Pan Maximizer feature achieves maximum heating of any induction compatible pan
- Drop-in cooktops and control boxes engineered and manufactured for easy installation
- Microprocessor monitors vital components 120 times per second to check for overheating, power supply problems, and more. Cooktop shuts off and displays error codes enabling user to diagnose and correct minor problems
- LED display for precise user feedback
- Automatic pan detection allows for instant energy transmission to pan and almost no energy consumption when pan is not present
- Automatic shut-off feature prohibits overheating
- Easy to clean glass-ceramic top surface
- Integral cooling fan keeps internal electronics cool

- Available in 5000 or 7000 watts (200-240VAC) - 2500 or 3500 watts per hob
- Two years parts and one year labour warranty
- Made in the USA*

Specifications

Shall be a CookTek drop-in double hob cooktop, model _____ with a total kW rating of _____.

Unit shall be manufactured in the United States and constructed with a stainless steel edging and a high impact, thick, glass-ceramic top.


Unit shall be equipped with a built-in microprocessor that performs precise temperature control, auto shut-off to prevent overheating, self-diagnostics, and a pan maximizer feature that ensures maximum heating of any induction compatible pan.

Unit shall have an adjustable electronic control with 20 power cook settings and 27 precise temperature settings.

Unit shall have a LED display located underneath the top for precise user feedback.

Unit shall operate on _____ power with integral _____ cord and plug (supplied).

*of USA and imported parts

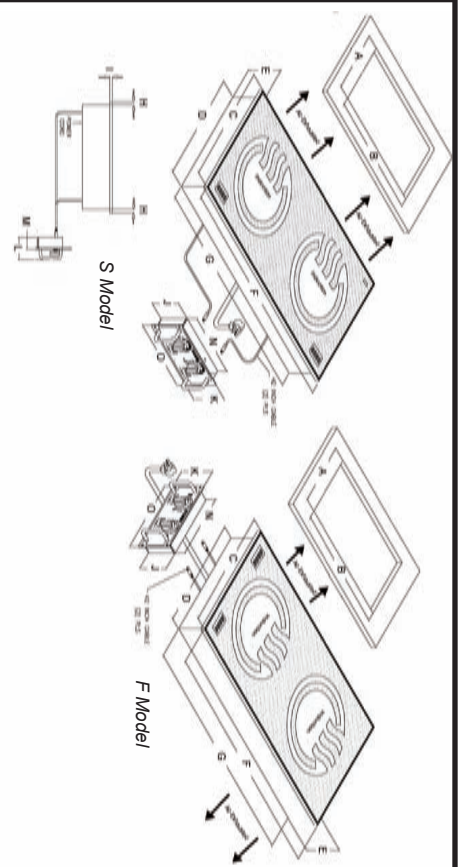

| Dimensions | | |
|------------|--------|-----|
| Inches | mm | |
| A | 13.125 | 333 |
| B | 26.875 | 682 |
| C | 13.75 | 349 |
| D | 12.75 | 323 |
| E | 3.73 | 94 |
| F | 27.50 | 698 |
| G | 26.50 | 673 |
| H | 0.50 | 12 |
| I | 0.35 | 8 |
| J | 3.25 | 82 |
| K | 3.75 | 95 |
| L | 2.75 | 69 |
| M | 1.44 | 36 |
| N | 7.50 | 190 |
| O | 8.50 | 215 |

- Dedicated circuit required
- Requires 140 CFM (4.0m³/min) free airflow with adequate enclosure venting and maximum (do not exceed) ambient temperature of 50 C/122°F
- Cooling clearance: 2" (55mm) for front, sides, and rear, 6" (152mm) below



Specifications

| Model Number | MCD2502F | MCD2502S | MCD3502F | MCD3502S |
|----------------------|-----------------------------------|-----------------------|-----------------------|-----------------------|
| Power Requirements | 200-240VAC, 1 Ph | 200-240VAC, 1 Ph | 200-240VAC, 1 Ph | 200-240VAC, 1 Ph |
| Power Consumption | 5000W (max. 2x2400W) | 5000W (max. 2x2400W) | 7000W (max. 2x3500W) | 7000W (max. 2x3500W) |
| BTU Comparison | 2 x 22,000 BTU | 2 x 22,000 BTU | 2 x 31,000 BTU | 2 x 31,000 BTU |
| Voltage | 200-240VAC, 50/60 Hz | 200-240VAC, 50/60 Hz | 200-240VAC, 50/60 Hz | 200-240VAC, 50/60 Hz |
| Amperage | 20A (max) | 20A (max) | 30A (max) | 30A (max) |
| Power Range | 100-2400W per hob | 100-2400W per hob | 100-3500W per hob | 100-3500W per hob |
| Temperature Range | 85-500°F / 30-260°C | 85-500°F / 30-260°C | 85-500°F / 30-260°C | 85-500°F / 30-260°C |
| Dimensions (in) | 27.5" x 13.75" x 3.7" | 13.75" x 27.5" x 3.7" | 27.5" x 13.75" x 3.7" | 13.75" x 27.5" x 3.7" |
| Dimensions (mm) | 698 x 349 x 93 | 349 x 698 x 93 | 698 x 349 x 93 | 349 x 698 x 93 |
| Cutout Dim. (in) | 26.875" x 13.125" | 13.125" x 26.875" | 26.875" x 13.125" | 13.125" x 26.875" |
| Cutout Dim. (mm) | 682 x 333 | 333 x 682 | 682 x 333 | 333 x 682 |
| Weight | 30 lbs / 13.61 kg | 30 lbs / 13.61 kg | 30 lbs / 13.61 kg | 30 lbs / 13.61 kg |
| Packaged Weight | 40 lbs / 18.14 kg | 40 lbs / 18.14 kg | 40 lbs / 18.14 kg | 40 lbs / 18.14 kg |
| Packaged Dim. (in) | 32" x 23" x 11" | 32" x 23" x 11" | 32" x 23" x 11" | 32" x 23" x 11" |
| Packaged Dim. (mm) | 812 x 584 x 279 | 812 x 584 x 279 | 812 x 584 x 279 | 812 x 584 x 279 |
| Power Cord Length | 6 ft / 1.8 m | 6 ft / 1.8 m | 6 ft / 1.8 m | 6 ft / 1.8 m |
| Plug Type | Country Specific | Country Specific | Country Specific | Country Specific |
| Crit Box Cord Length | 42" / 1.07 m | 42" / 1.07 m | 42" / 1.07 m | 42" / 1.07 m |
| Warranty | 2 years parts and one year labour | | | |

Note: Ambient air should not exceed 50 C/122 F. Dedicated circuit required. Many local codes exist, and it is the Owner and Installer's responsibility to comply with those codes. CookTek continually improves its products and reserves the right to change or improve specifications without notice.

DROP > IN DOUBLE HOB COOKTOP MCD2502F, MCD2502S, MCD3002F, MCD3002S, MCD3502F, MCD3502S