

Product Name	Counter-Top Single Hob Cooktop	Quantity		Item #	
--------------	--------------------------------	----------	--	--------	--



Note: Induction cooking requires the use of induction compatible (i.e. magnetic) pots and pans.



COUNTER>TOP SINGLE HOB COOKTOP

MC2500, MC3500

Standard Features

- Portable tabletop design with stainless steel housing, heavy duty, electronic components, and high impact, thick, glass-ceramic top engineered for use in commercial kitchens
- Control knob for ease of use and automatic power or temperature control
- Temperature control allows for 27 precise temperature settings and 20 power cook settings
- Pan Maximizer feature achieves maximum heating of any induction compatible pan
- Microprocessor monitors vital components 120 times per second to check for overheating, power supply problems, and more. Cooktop shuts off and displays error codes enabling user to diagnose and correct minor problems
- LED display for precise user feedback
- Automatic pan detection allows for instant energy transmission to pan and almost no energy consumption when pan is not present
- Automatic shut-off feature prohibits overheating
- Integral grease filter and air baffle to ensure cleaner and cooler air intake
- Sloped front panel allows for easy viewing and operation
- Easy to clean glass-ceramic top surface
- Integral cooling fan keeps internal electronics cool
- Available in 2400, and 3500 watts (208-240VAC)

- Two years parts and one year labour warranty
- Made in the USA*

Specifications

Shall be a CookTek counter-top induction cooktop, model _____ with a total kW rating of _____.

Unit shall be manufactured in the United States and constructed of a stainless steel housing and a high impact glass-ceramic top.

Unit shall be equipped with a built-in microprocessor that performs precise temperature control, auto shut-off to prevent overheating, self-diagnostics and a pan maximizer feature that ensures maximum heating of any induction compatible pan.


Unit shall have adjustable electronic control with 20 power cook settings and 27 precise temperature settings.

Unit shall operate on _____ power with integral _____ cord and plug (supplied).

*of USA and imported parts

COUNTER>TOP SINGLE HOB COOKTOP

MC2500, MC3500

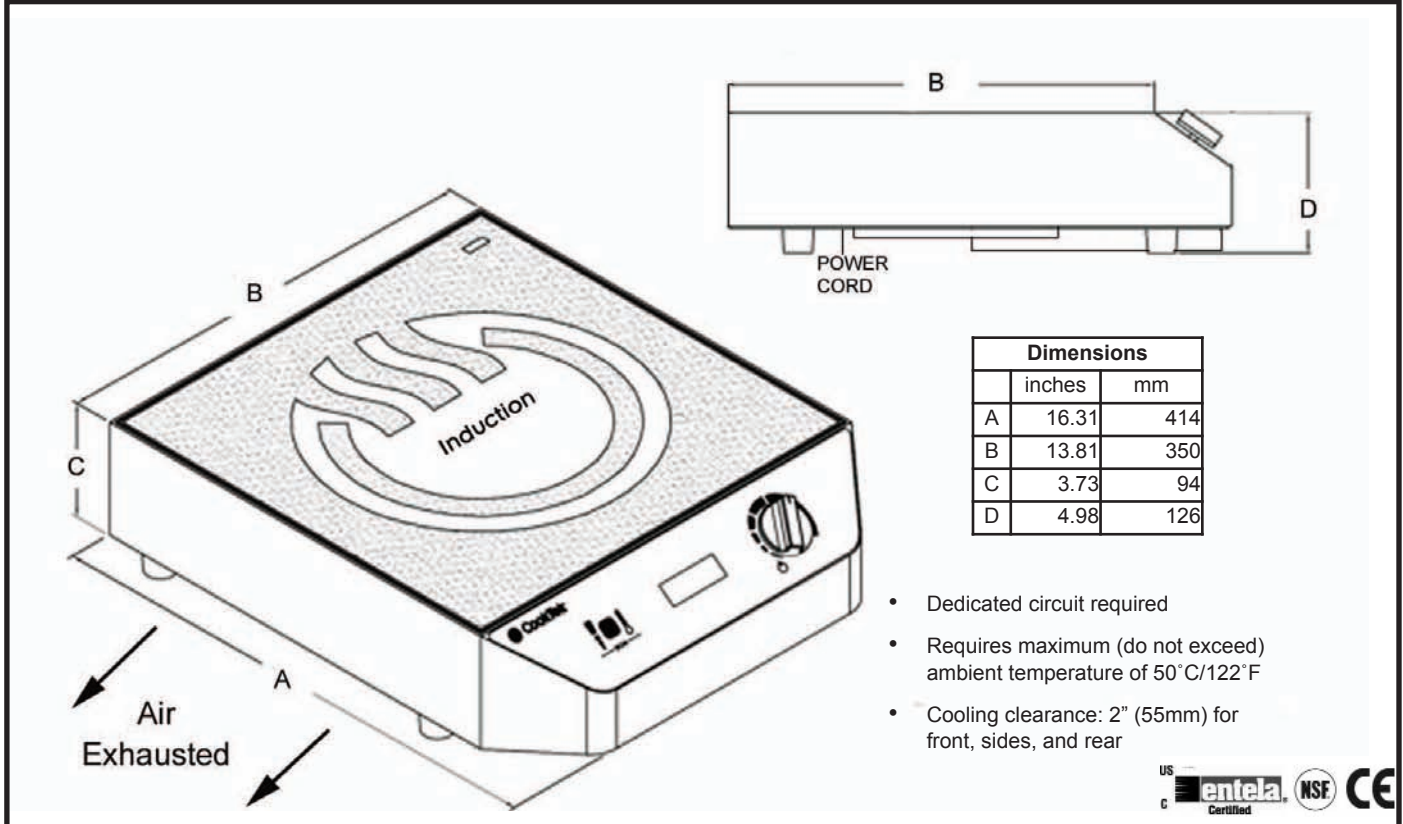

Dimensions		
	inches	mm
A	16.31	414
B	13.81	350
C	3.73	94
D	4.98	126

- Dedicated circuit required
- Requires maximum (do not exceed) ambient temperature of 50° C/122° F
- Cooling clearance: 2" (55mm) for front, sides, and rear



Specifications

	MC2500	MC3500
Model Number	MC2500	MC3500
Power Requirements	208-240VAC, 1 Ph	208-240VAC, 1 Ph
Power Consumption	2400W (max rating)	3500W (max rating)
BTU Comparison	22,000 BTU	31,000 BTU
Voltage	208-240VAC, 50/60 Hz	208-240VAC, 50/60 Hz
Amperage	10A (max)	15A (max)
Power Range	100-2400W	100-3500W
Temperature Range	85-500°F / 30-260°C	85-500°F / 30-260°C
Dimensions (in)	16.31" x 13.81" x 4.98"	16.31" x 13.81" x 4.98"
Dimensions (mm)	414 x 350 x 126	414 x 350 x 126
Weight	19 lbs / 8.6 kg	19 lbs / 8.6 kg
Packaged Weight	24 lbs / 10.4 kg	24 lbs / 10.4 kg
Packaged Dimensions (in)	20.75" x 18.75" x 9"	20.75" x 18.75" x 9"
Packaged Dimensions (mm)	527 x 476 x 229	527 x 476 x 229
Power Cord Length	6 ft / 1.8 m	6 ft / 1.8 m
Plug Type	Country Specific	Country Specific

Warranty 2 years parts and one year labour

Note: Ambient air should not exceed 50° C/122° F. Dedicated circuit required. Many local codes exist, and it is the Owner and Installer's responsibility to comply with those codes. CookTek continually improves its products and reserves the right to change or improve specifications without notice.

COOKTEK®

Phone: 1300 79 1954
 Fax: 07 3345 6403
 Email: cooktek@stoddart.com.au

Brisbane - Melbourne - Sydney - Perth - Adelaide

Australian distributor:
 Stoddart Food Service Equipment
 www.stoddart.com.au